



Repairing Palm Treo 650 Camera



Step 1 - Battery

- Place your Palm Treo 650 on a table in front of you as shown.



Step 2

- Flip the phone over as shown.
- Remove the stylus found on the back of your phone.



Step 3

- Remove battery cover.
- Hold down the button on the back near the middle of the phone.
- Slide the cover down.



Step 4

- Lift the edge of the battery as pictured and pull out.





Step 5 - installation Case

- Remove the small round rubber cover on the back of the phone.
- This will uncover a screw that will be removed in an upcoming step.



Step 6

- Unscrew six 6.9 mm black screws with a T5 Star screwdriver.
- Unscrew one 9.75 mm antenna screw with a T5 Star screwdriver.
- Pull out antenna.





Step 7

- Pry the back cover off using an iPod opening tool or a similar tool.
- The back cover is attached by several small clips on the inside.



Step 8 - Camera



- Remove the two 3.75 mm screws.
- Pull off the logic board.






Step 9


- Pull the rubber ring off of the camera.

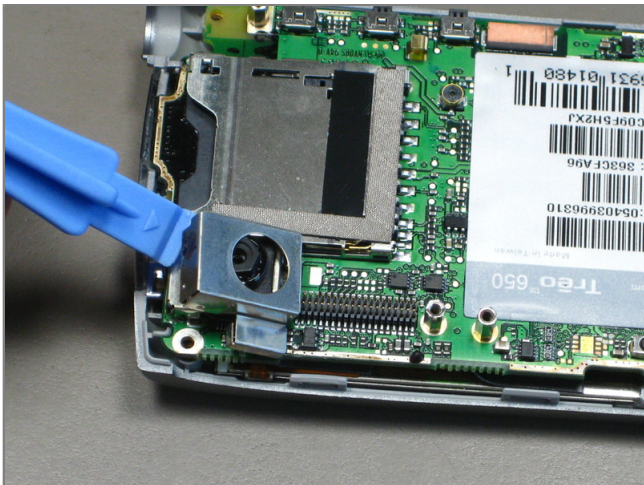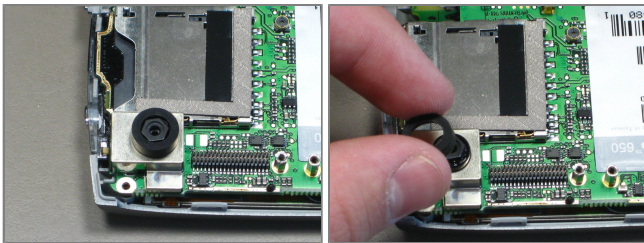

Step 10

- Pry off the metal camera case.
- Lift up the camera, but do not remove. The connector must be detached first.



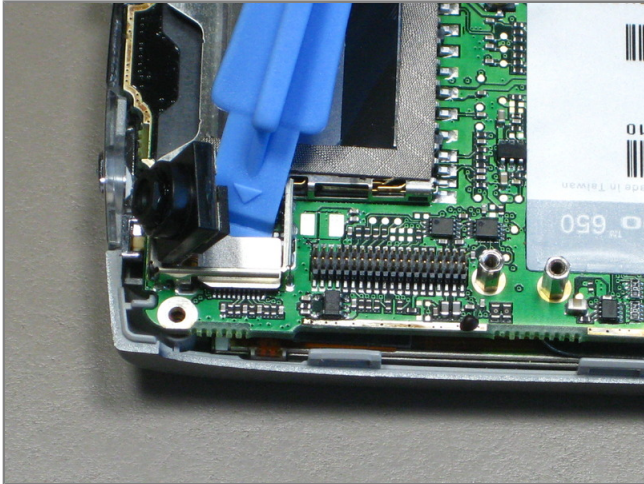

Step 11

- Pry off the camera connector plug.
- Remove the camera.

